
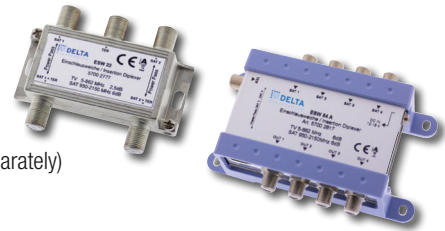






SAT-IF INSERTION DIPLEXER

- || To combine terrestrial/CATV- and SAT-IF signals
- || **SW 44/SW 54** For Quad-LNB
- || **ESW 54 A:**
For Quattro-LNB and Multiswitches
Socket jack for optional continuous feeding with power supply NT 18-1200 (please order separately)
- || **SWW 21:** Feed FM/DAB into wideband signals
- || Low through loss



| Type | SWW 21 | ESW 22 | SW 44 | SW 54 | ESW 54 A |
|-------------------------------------|---|---|--|---|---|
| Item No. | 57005340 | 57002777 | 57002892 | 57003907 | 57002817 |
| |  |  |  |  |  |
| Frequency range | MHz 5-230 280-2.500 | 5-862 950-2.150 | 5-862 950-2.150 | 5-862 950-2.150 | 47-862 950-2.150 |
| Inputs | 1 1 | 1 2 | 1 4 | 1 4 | 1 4 |
| Outputs | 1 | 2 | 4 | 4 | 4 |
| Insertion loss (Ter active) | dB | | | | 4 ... 6 4 ... 6 |
| Insertion loss (Ter passiv) | dB | 3 ... 5 | < 9 | < 10 | |
| Output level 60 dB IMA ₃ | dBμV | | | | 88 |
| Isolation SAT/TER | dB | > 30 | ≥ 30 | > 30 | |
| Power supply | - | - | - | by Receiver | by Receiver or through external power supply |
| Power Passing | max. 1 A | max. 1 A | max. 0,5 A | max. 0,5 A | max. 0,5 A |
| Power consumption | mA | | | | < 50 (12...18 VDC) |
| Connectors | F female | F female | F female | F female | F female |
| Dimensions | mm 75 x 38 x 16 | 75 x 58 x 16 | 160 x 75 x 35 | 135 x 82 x 22 | 110 x 90 x 35 |
| Weight | kg 0.056 | 0.075 | 0.224 | 0.27 | 0.3 |

discontinued