

## HEADEND KAB


Devices for KAB 2000 and KAB 3000 headend units still available on request.



## HEADEND KAB 4000

### KAB 4000 – Headend Basic Unit

- || 8,4 or 2 slots for Quattro- and Twin-modules
- || Processing of up to 16 channels or 32 transponders
- || Collector of the headend 8-way (4- or 2-way) active 47-862 MHz integrated, suitable for adjacent channels
- || Programming via PC or tablet
- || Modulators separately adjustable
- || Compact, appealing design
- || Easy and reliable operation
  - Energy efficient, reliable power supply unit

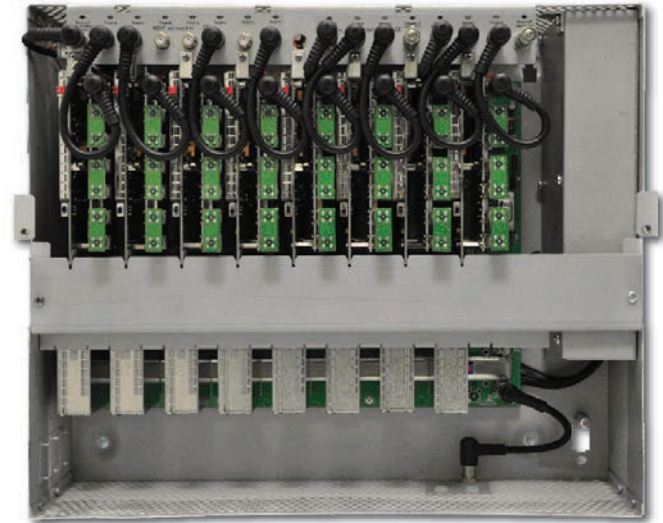

Type	KAB 4000 BASIC UNIT		
Article-No.	57002879	57002878	57002156
Description	KAB 4000 B2	KAB 4000 B4	KAB 4000 B8
Possible Modulations	<ul style="list-style-type: none"> <li>• DVB-S/S2/T/T2/C in QAM or COFDM</li> <li>• DVB-S in QAM or PAL</li> <li>• HDMI in QAM or COFDM</li> <li>• AV in QAM, COFDM or RF-output channel</li> <li>• COFDM in PAL</li> <li>• HDMI &amp; AV in QAM or COFDM</li> <li>• Audio in TV mode</li> </ul>		
Software-Update	RS 232-Interface, fast update by software multiupdate		
Frequency range input (SAT)	950-2150 MHz		
LNB-power / max. current	12 V / 0.25 A at each input, max. 0.5A		
Output level	analogue 106 dBµV; digital 103dBµV		
Test- / Measuring output	-20 dB		
Power supply	180 - 265 V AC		
Power input			max. 180 W
Weight	2.4 kg	5 kg	9 kg
Dimensions (W x L X D)	115 x 240 x 235 mm	265 x 370 x 170 mm	440 (19") x 370 x 170 mm