



HIGH-Q WALL OUTLET SAT-IF

- Applicable for SAT-IF and terrestrial transmission
- Band filter for FM with low loss and high output isolation
- Loop through models: **SDD....QD** with DC-pass and diode isolated, e. g. for digital unicable solution with MSW or MSU
UNICABLE READY

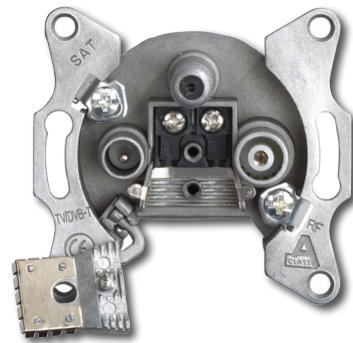

Type	Frequency range	SEA 2400 Q	SEA 2400 QR	SDD 2411 QD	SDD 2414 QD	SDD 2419 QD	SDD 2424 QD
Item No.		57001528 57001598	57002344	57002346	57001442	57002345	57001443
Description		Terminal	Terminal	Loop through	Loop through	Loop through	Loop through
Attenuation							
TV OUT (IEC-male)	dB 4-68 / 125-862 MHz	1.0 - 2.0	8.5	12	19	14	24
FM OUT (IEC-female)	dB 87.5-108 MHz	1.0	8.5	16	19	17	24
SAT OUT (F-female)	dB 950-2200 MHz	1.5	7	11	19	14	24
Trunkline OUT	dB 5-862 / 950-2200 MHz	-	-	3.5 / 6	1.9 / 4.0	3 / 5.5	1.7 / 3.5
Isolation	5-65 / 85-862 MHz						
between the connector	dB SAT <-> TV/RF	30	20	20	25	20	25
between the connector	dB TV <-> RF	25	26	20	24	20	24
between the connector	dB OUT <-> SAT/TV	-	-	18	22	18	22
DC pass	SAT	13/18 V, 22 kHz	13/18 V, 22 kHz	13/18 V, 22 kHz	13/18 V, 22 kHz	13/18 V, 22 kHz	13/18 V, 22 kHz
Weight	kg	0.1	0.1	0.1	0.1	0.1	0.1

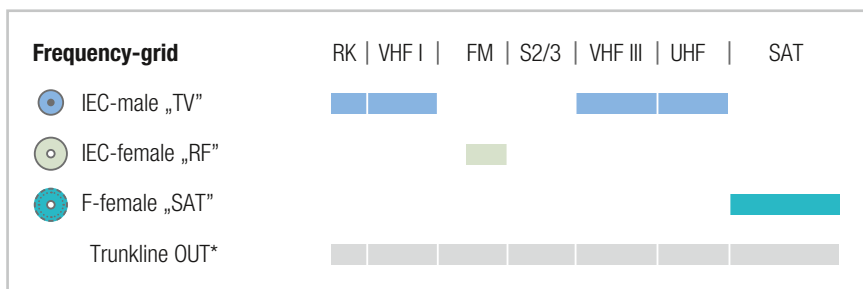

*only SDD 24xx QD