


OPTICAL RECEIVER

OR 10 T

- || Converts one wavelength (1550 nm) into HF signal
- || Perfect addition for the MSW Multiswitches series of DELTA Electronics
- || Variable attenuator 0 to 20 dB
- || Including power adaptor

OR 25

- || Perfect match for the MSW Multiswitches series of DELTA Electronics
- || Perfect receiver for the Optical Compact Transmitter of DELTA Electronics
OCH2 31-33-00-0 (Item-No. 57004159)
OCH2 31-33-55-0 (Item-No. 57004160)

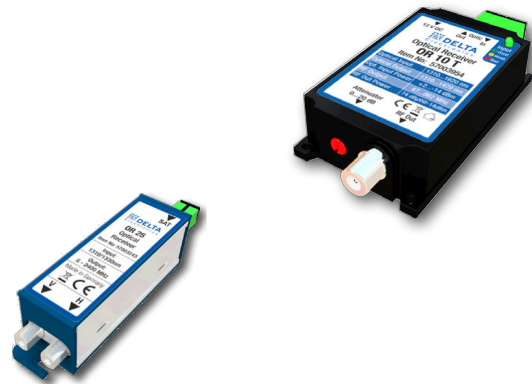

Type		OR 10 T	OR 25
Item No.		57003954	57003243
Description		Single Receiver	Twin Receiver
Optical wavelengths	nm	1550	1310 / 1330
Optical input power	dBm	≥ -12...+6	≥ -12...+6
RF output level	dBμV	74	74
Variable RF output attenuation	dB	0...20	
Frequency range	MHz	47...862	8...2400
Return loss	dB	-15	-15
Photo diode type		PIN	PIN
Power consumption	W	1.2	1.2
Optical connector		SC / APC	SC / APC
RF connectors		F-female	F-female
Operating temperature range	°C	-20...+55	-20...+55
Protection class		IP 20	IP 20
Dimensions	mm	115 x 50 x 25	128 x 32 x 36
Weight	kg	0.8	0.25