
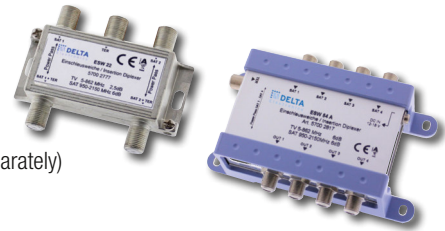






## SAT-IF INSERTION DIPLEXER

- || To combine terrestrial/CATV- and SAT-IF signals
- || **SW 44/SW 54** For Quad-LNB
- || **ESW 54 A:**  
For Quattro-LNB and Multiswitches  
Socket jack for optional continuous feeding with power supply NT 18-1200 (please order separately)
- || **SWW 21:** Feed FM/DAB into wideband signals
- || Low through loss



Type	SWW 21	ESW 22	SW 44	SW 54	ESW 54 A
Item No.	57005340	57002777	57002892	57003907	57002817
					
Frequency range	MHz 5-230 280-2.500	5-862 950-2.150	5-862 950-2.150	5-862 950-2.150	47-862 950-2.150
Inputs	1 1	1 2	1 4	1 4	1 4
Outputs	1	2	4	4	4
Insertion loss (Ter active)	dB				4 ... 6 4 ... 6
Insertion loss (Ter passiv)	dB	3 ... 5	< 9	< 10	
Output level 60 dB IMA <sub>3</sub>	dBμV				88
Isolation SAT/TER	dB	> 30	≥ 30	> 30	
Power supply	-	-	-	by Receiver	by Receiver or through external power supply
Power Passing	max. 1 A	max. 1 A	max. 0,5 A	max. 0,5 A	max. 0,5 A
Power consumption	mA				< 50 (12...18 VDC)
Connectors	F female	F female	F female	F female	F female
Dimensions	mm 75 x 38 x 16	75 x 58 x 16	160 x 75 x 35	135 x 82 x 22	110 x 90 x 35
Weight	kg 0.056	0.075	0.224	0.27	0.3

discontinued